


Chyme® Cylo

Chyme® Accent

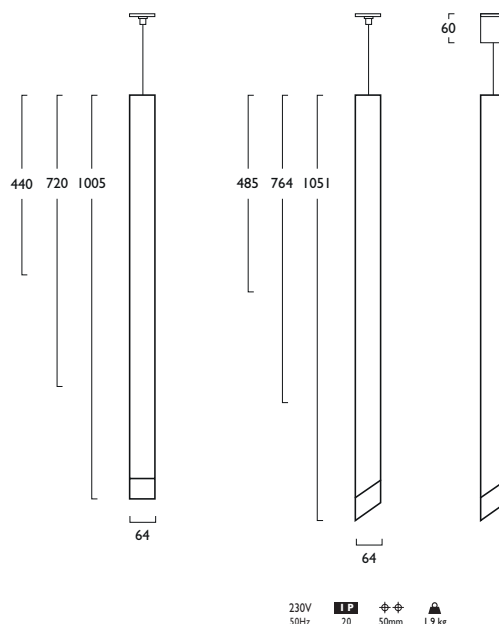

230V 50Hz IP20 50mm 1.9kg

Chyme® Cylo

LED	☀	📏	🏠	📏	📏	📏	📏	📏	📏	📏
7W	LED	440	PN 1166	LED	07	+	504			
7W	LED	720	PN 1168	LED	07	+	506			
7W	LED	1005	PN 1170	LED	07	+	508			

Chyme® Accent

LED	☀	📏	🏠	📏	📏	📏	📏	📏	📏	📏
7W	LED	485	PN 1172	LED	07	+	504			
7W	LED	764	PN 1174	LED	07	+	506			
7W	LED	1051	PN 1176	LED	07	+	508			

3	Warm White LED (3000K)	CRI 80	7W
	Lumen Output		1164 lm
	LOR		0.63
	CRI		80
	Total Power		6.9W
	Power Factor		0.75
	Running Current		0.04A
	Inrush Current (Std)		3.0A (45us)
	Inrush Current (Dim)		13.8A (282us)
	Efficacy		106 lm/W
	Emergency Output (BLF)		N/A

4	Neutral White LED (4000K)	CRI 80	7W
	Lumen Output		1212 lm
	LOR		0.63
	CRI		80
	Total Power		6.9W
	Power Factor		0.75
	Running Current		0.04A
	Inrush Current (Std)		3.0A (45us)
	Inrush Current (Dim)		13.8A (282us)
	Efficacy		110 lm/W
	Emergency Output (BLF)		N/A

- Slim, contemporary LED Pendant available in a choice of 3 lengths and 2 design options
- Lumen outputs from 1164 to 1212 lumens
- Efficacies of up to 110 lm/W
- Single point Zhaga Book 3 LED
- Life expectancy in excess of 60,000 hours (L90 B10)
- Colour stability within 3 MacAdams
- A range of specialist finishes available on request, including: Copper Metallic, Anthracite Metallic, Anodic Malachite, Anodic Gold and Pearl Gentian Blue Metallic
- Wireless Lighting Control available, see Connected video for full overview


Gear type F & G must be operated through a DSI

- A Integral Driver/Remote
 - F Digital Dim
 - J Switch Dim
 - S DALI Dim
 - L DALI Bluetooth
- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- 561 5m Suspension (wire only)
562 Connector Housing

Photometrics



562 Connector Housing

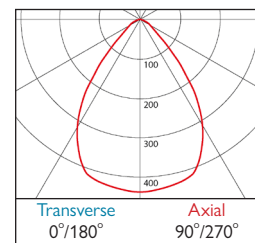

504, 506, 508 DLOR: 0.63

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk V4 - 09/2024

* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.