



Maximum viewing distance 28m



Arrow Left

ISO Single & Double Sided



Arrow Right

ISO Single & Double Sided



Arrow Up

ISO Single & Double Sided



Arrow Down


ISO Single & Double Sided

Emerge Eco Exit Sign

LED	☀	🏠	📏	🔌	🔒			
1W LED	Surface (Ceiling/Wall)	SD1544	E	LED 001	I	1	N/a	
1W LED	Recessed (Ceiling/Wall)	ID1545	E	LED 001	I	1	N/a	
1W LED	Suspended (Ceiling)	PN1546	E	LED 001	I	1	N/a	

	IW
Lumen Output	N/a
LOR	1.00
CRI/Ra Index	80
Total Power	2.3W
Power Factor	0.53
Running Current	0.02A
Inrush Current	18.7A (3us)
Emergency Output (BFL)	N/a

- Surface, Wall, Recessed and Suspended, three hour Emergency Exit luminaires
- Hinged blade for wall mounting which also allows mounting on angled surfaces
- Non Maintained operation only
- Viewing distance 28m
- Supplied with Interchangeable ISO Legend Pack: Arrow Left, Arrow Right, Arrow Up and Arrow Down
- Life expectancy 100,000 hours (L70 B10)
- Recharge period 24 hours

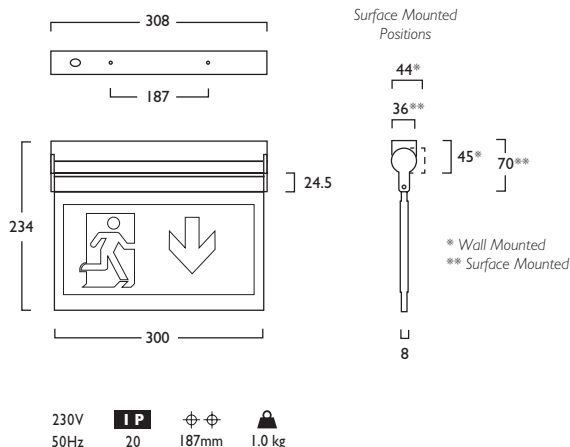

E Emergency

I White