




3	Warm White LED (3000K)	CRI 80	6W	8W	12W
	Lumen Output		1158 lm	1438 lm	1984 lm
	LOR		0.84	0.84	0.84
	CRI		80	80	80
	Total Power		7.2W	9W	12.8W
	Power Factor		0.92	0.9	0.94
	Running Current		0.05A	0.04A	0.08A
	Inrush Current (STD)		3A (60us)	3.5A (35us)	3.5A (35us)
	Inrush Current (DIM)		10A (80us)	10A (80us)	10A (80us)
	Efficacy		135 lm/W	134 lm/W	130 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A

4	Neutral White LED (4000K)	CRI 80	6W	8W	12W
	Lumen Output		1215 lm	1509 lm	2082 lm
	LOR		0.84	0.84	0.84
	CRI		80	80	80
	Total Power		7.2W	9W	12.8W
	Power Factor		0.92	0.9	0.94
	Running Current		0.05A	0.04A	0.08A
	Inrush Current (STD)		3A (60us)	3.5A (35us)	3.5A (35us)
	Inrush Current (DIM)		10A (80us)	10A (80us)	10A (80us)
	Efficacy		141 lm/W	140 lm/W	136 lm/W
	Emergency Output (BLF)		N/A	N/A	N/A

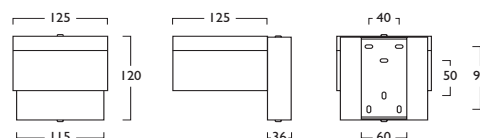

230V 50Hz **IP** 20  $\varnothing$  50mm 0.9 kg

## Quba Solo




### LED

6W	LED	WLO60	LED	06	426
8W	LED	WLO60	LED	08	426
12W	LED	WLO60	LED	12	426

- Sharp design, cutting edge appearance
- Available in a choice of lumen outputs, delivering up to 2082 lumens
- Efficacies up to 141 lm/W
- Discreetly etched polycarbonate diffusers
- Life expectancy in excess of 72,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- DSI available on request

### Photometrics

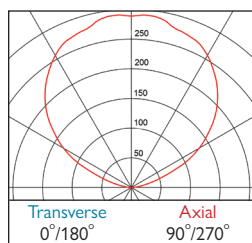

- A** Integral Driver/Remote
- J** Switch Dim
- S** DALI Dim

**3** Warm (3000K) **4** Neutral (4000K)

**1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)

V4 - 08/2024

\* All values provided in this document are subject to International standards and electronic components from leading suppliers which are subject to +/- 10% tolerance and apply at an ambient temperature of 25°C. Hacel Lighting look to constantly improve it's product and reserve the right to change specifications without prior notification.

