


SkyMod® Wafer Linear Grid



LED

17W	LED	IM1589	LED	17	1	609
25W	LED	IM1589	LED	25	1	609
29W	LED	IM1589	LED	29	1	609

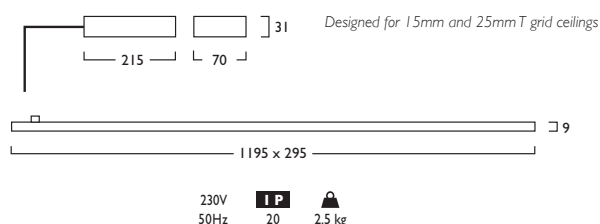

3	Warm White LED (3000K)	CRI 80	17W	25W	29W
	Lumen Output		2106 lm	2976 lm	3405 lm
	LOR		1.00	1.00	1.00
	CRI		80	80	80
	Total Power		18.8W	27.7W	32.3W
	Power Factor		0.96	0.9	0.97
	Running Current		0.08A	0.13A	0.13A
	Inrush Current		18A (210us)	24.7A (267us)	24A (200us)
	Efficacy		112 lm/W	107 lm/W	105 lm/W
	Emergency Output (BLF)		188 lm (8%)	188 lm (6%)	188 lm (5%)

4	Neutral White LED (4000K)	CRI 80	17W	25W	29W
	Lumen Output		2319 lm	3255 lm	3688 lm
	LOR		1.00	1.00	1.00
	CRI		80	80	80
	Total Power		18.8W	27.7W	32.3W
	Power Factor		0.96	0.9	0.97
	Running Current		0.08A	0.13A	0.13A
	Inrush Current		18A (210us)	24.7A (267us)	24A (200us)
	Efficacy		123 lm/W	116 lm/W	114 lm/W
	Emergency Output (BLF)		210 lm (8%)	201 lm (6%)	201 lm (5%)

- Ultra slim profile of only 9mm
- High quality Polycarbonate Micro Prism refractor offering UGR <19
- Luminance limit below 3000cd/m² at the 65° cut off
- Delivering up to 3688 lumens
- Efficacies up to 123 lm/W
- Life expectancy in excess of 50,000 hours (L80 B10)
- Wide choice of high quality control gear
- Wireless Lighting Control available, see Connected video for full overview
- Digital Dim and Digital Dim + Emergency options available

Gear types F & V must be operated through a DSI


- A** Integral Driver/Remote
- E** Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency
- L** DALI Bluetooth
- M** DALI Bluetooth + Emergency

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010)

Interconnection options available contact Sales

Photometrics



609 DLOR: 1.00